



HOUSTON • MIDLAND • DENVER



office
(713) 225-6661


fax
(713) 225-6022

www.BKCORROSION.com

4411 Navigation Boulevard
Houston, TX 77011

Ideal for low chloride or saline production water tanks, our easy to replace aluminum tank anodes prevents corrosion caused by produced water. This anode, cast with high voltage, high potential alloys, along with its cylindrical shape, produces the best current output. Wire lengths of 15', 20', and 25' are standard, however, we can customize your lengths, if needed. A shunt should be placed in series with the lead wire and structure to measure the current out put in order to determine the life expectancy of the anodes.

Our aluminum tank anodes, paired with our heater treaters, can save you money on repairs, allowing for increased productivity. When it's time to replace your anode, BK's aluminum tank anodes are your go-to solution.

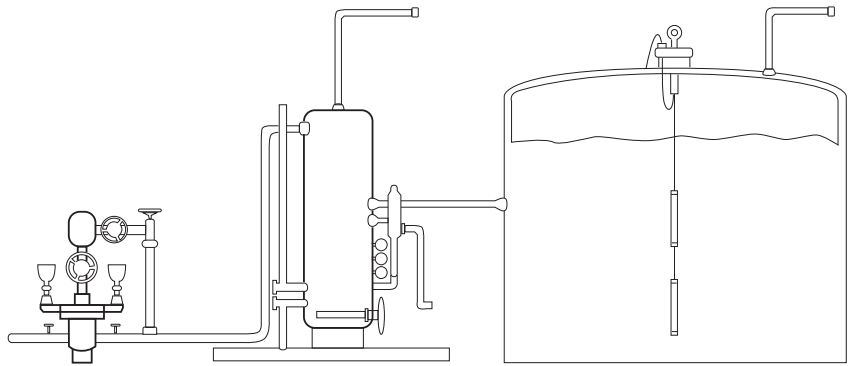

MULTI-TANK ANODES

When your project needs a little extra CP, we have the option of multiple tank anodes. Specify whether you need two or three anodes and we can create a set of multiple wired anodes that are easy to swap out when needed. Wire lengths are completely customizable. Please let us know your lengths when placing your order.

BOWLING BALL

When your project needs a special alternative to the standard aluminum tank anodes, we also offer the bowling ball style anode.



STANDARD SPECIFICATIONS

- -1.15v Electrode Potential (Cu/Cu SO4)
- 85% Nominal Efficiency
- 1150 Nominal Ampere Hours / Pound

ALLOY COMPOSITIONS	ELEMENT	%
	Zinc	2.8 - 6.5%
	Indium	0.010 - 0.02%
	Silicon	0.08 - 0.2%
	Copper (Max.)	0.006%
	Iron (Max.)	0.120%
	Cadmium (Max.)	0.002%
	Others Each (Max.)	0.02%
	Others Total (Max.)	0.05%
	Aluminum	Balance

BENEFITS

- High Current Capacity Under Variable Conditions
- Desirable Operating Potential
- Current Capacity Maintenance Over Time
- Constant Potential Over Time



STANDARD SIZES AVAILABLE

PRODUCT NO.	DESCRIPTION	ANODE MEASUREMENTS			STRUCTURE INLET
		DIAMETER	LENGTH	WEIGHT (LBS)	
ALUMHS47BB	Aluminum HS-47 Bowling Ball	9.8"	13.8"	47	
BKALUM3X30WIRE	Aluminum 3x30 with Wire	3"	30"	18.5 + wire	4"
BKALUM3X60WIRE	Aluminum 3x60 with Wire	3"	60"	37 + wire	4"
BKALUMSTR2	Aluminum String (2) 3x60 with Wire	3"	60"	37 + wire	4"
BKALUMSTR3	Aluminum String (3) 3x60 with Wire	3"	60"	37 (2) + wire	4"
RSSHUNT	Shunt, Holloway; Type RS 0.01 Ohm	#12 Gauge	5.75"	37 (3) + wire	4"

We offer a KA4C Lug and 3/4" flat steel washer, upon request. When ordering part, please add WOLW (without lug and washer), or WLW (with lug and washer) to the Product Number. RS Shunts are recommended for each installation.